



ENERGY TAJHIZ MELAL

تجهیزات انرژی، تأسیسات و اتوماسیون صنایع

کاتالوگ محصولات

DUNGS®
Combustion Controls

درباره شرکت DUNGS

شرکت DUNGS یک شرکت آلمانی برجسته و معتبر در حوزه فناوری ایمنی و کنترل گاز احتراقی است که به عنوان مرجع جهانی در توسعه و تولید راهکارهای ایمن برای سوخت‌های گازی شناخته می‌شود. این برند با بیش از نیم قرن تجربه، مجموعه‌ای جامع از شیرهای ایمنی و قطع‌کن، رگولاتورهای فشار، کلیدهای فشار، کنترل‌های مشعل و سیستم‌های کامل گاز را برای کاربردهای صنعتی طراحی و تولید می‌کند که در صنایع انرژی، نیروگاه‌ها، گرمایش صنعتی، مشعل‌ها و فرایندهای احتراقی کاربرد دارند. محصولات DUNGS با استانداردهای جهانی انطباق یافته و در پروژه‌های بزرگ فرآیندی و حرارتی در سراسر دنیا مورد استفاده قرار می‌گیرند.

سبد محصولات DUNGS، از راهکارهای ترکیبی GasMultiBloc® و GasValveUnit گرفته تا شیرهای کنترل جریان، تنظیم فشار و سیستم‌های ایمنی چندمرحله‌ای، به مهندسان امکان می‌دهد تا پایش دقیق، ایمنی بالا و عملکرد بهینه در کاربردهای گازی را با اطمینان اجرا کنند. این برند به واسطه مهندسی دقیق، کیفیت ساخت بالای قطعات و پشتیبانی تکنیکی جهانی، انتخاب قابل اعتماد برای پروژه‌های صنعتی سطح بالا محسوب می‌شود.

مرجع تجهیزات انرژی، تأسیسات و اتوماسیون صنایع

انرژی تجهیز ملل، فروشگاه تخصصی تأمین تجهیزات انرژی، تأسیسات و احتراق است. از مشعل و کنترلر تا شیرآلات کنترلی و سیستم‌های هوشمند موتورخانه، هر آنچه برای راه‌اندازی، نگهداری و بهینه‌سازی سیستم‌های انرژی نیاز دارید، در یک مجموعه مهندسی شده در دسترس شماست.


تلفن ثابت: (+98) 21 8280 1045

همراه: (+98) 910 888 1035 - (+98) 910 888 1045

وب سایت: www.energy-tajhiz.com

ایمیل: info@energy-tajhiz.com

GasMultiBloc® Generation E

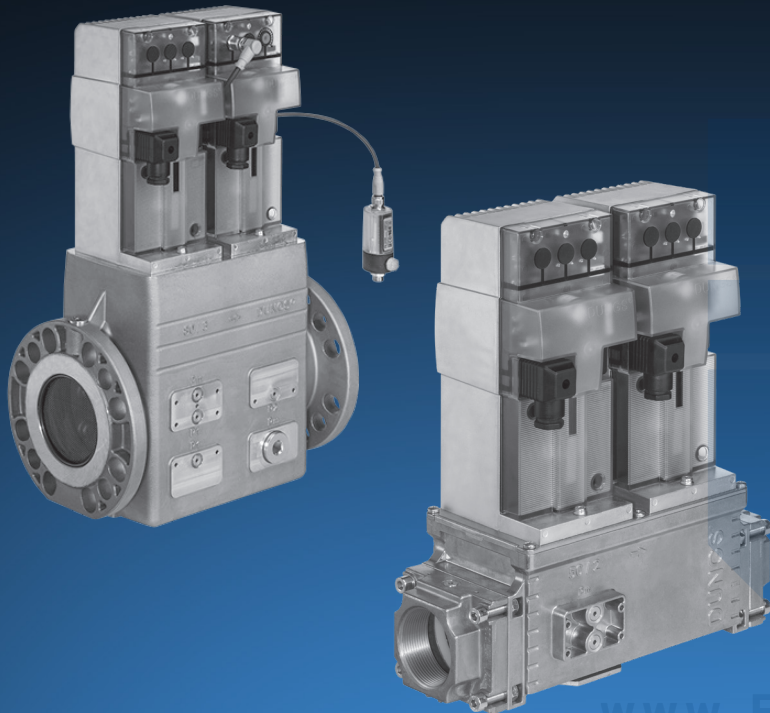

GasMultiBloc® MBE Generation E

The MBE multifunctional control combines the housing with two safety shutoff valves (ValveBody) and two electronic drives (ValveDrive) to actuate the safety valves and, optionally, to control the outlet pressure.


- 2 safety shutoff valves acc. EN 161
- Maximum inlet pressure of up to 70 kPa (700 mbar)
- Voltages: 100-240 VAC & 24 VDC
- Regulator function as per EN 88-1 & EN 88-3
- 3 sensors (PS) cover the outlet pressure range of (0-50 kPa)
- High flow rate with low pressure loss
- Biogas tested to max. 1.0 vol. % H₂S
- Modular system
- Simple assembly
- Lightweight design
- Worldwide approvals

ValveBody VB	3
ValveDrive VD	4
PressureSensor PS	5
Technical data	6-8
Approvals	9
Dimensions	10
Pressure taps	11
MBE components	12-14
System accessories	15
Flow diagram	16-22
Contact	24

www.Energy-Tajhiz.com

ValveBody (VB)

The ValveBody combines two spring-loaded safety shutoff valves in one housing. The valves always remain closed when de-energised.


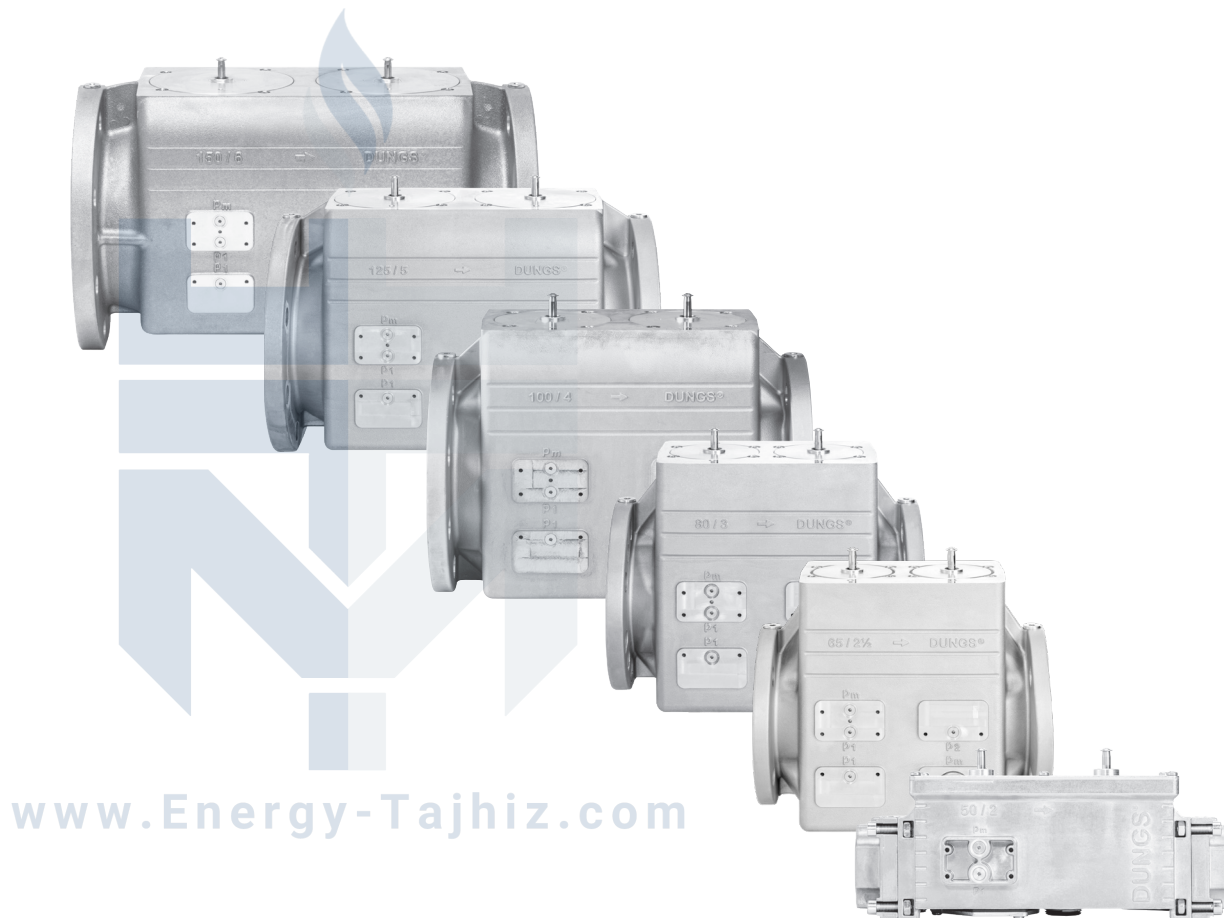


ValveDrive (VD)

The ValveDrive is an electronic actuator with a stepper motor for the following voltages: 100-240 VAC 50/60 Hz and 24 VDC. Each ValveDrive can be combined with all ValveBody versions. Operation mode is indicated with a blue LED. A visual position indicator is integrated as standard. Each ValveBody must be fitted with two ValveDrives.

The following models are available:


- VD-V-(AC/DC)
Open/close valve drive
- VD-R-(AC/DC)
Open/close valve drive with pressure regulation function
- VD-(V/R)-(AC/DC)-POC
Open/close valve drive with optional pressure regulation function and integrated closed position indicator switch

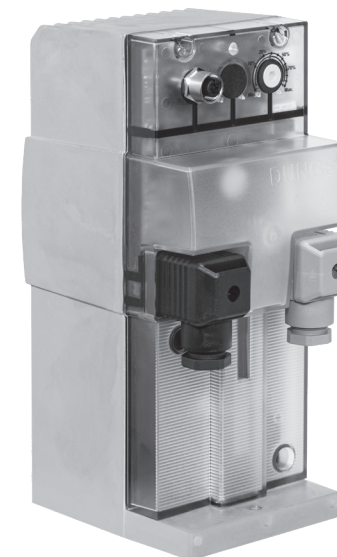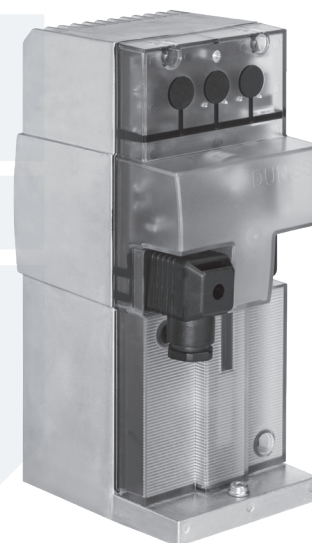

www.Energy-Tajhiz.com


PressureSensor (PS)

The PressureSensor is a high-precision electronic pressure sensor with a digital interface. The PS is mounted on the outlet side of the ValveBody. The outlet pressure is measured by the PressureSensor outlet side or downstream of the VB. The pressure signal is transmitted to the VD-R via the BUS cable. The nominal value is pre-adjusted manually.

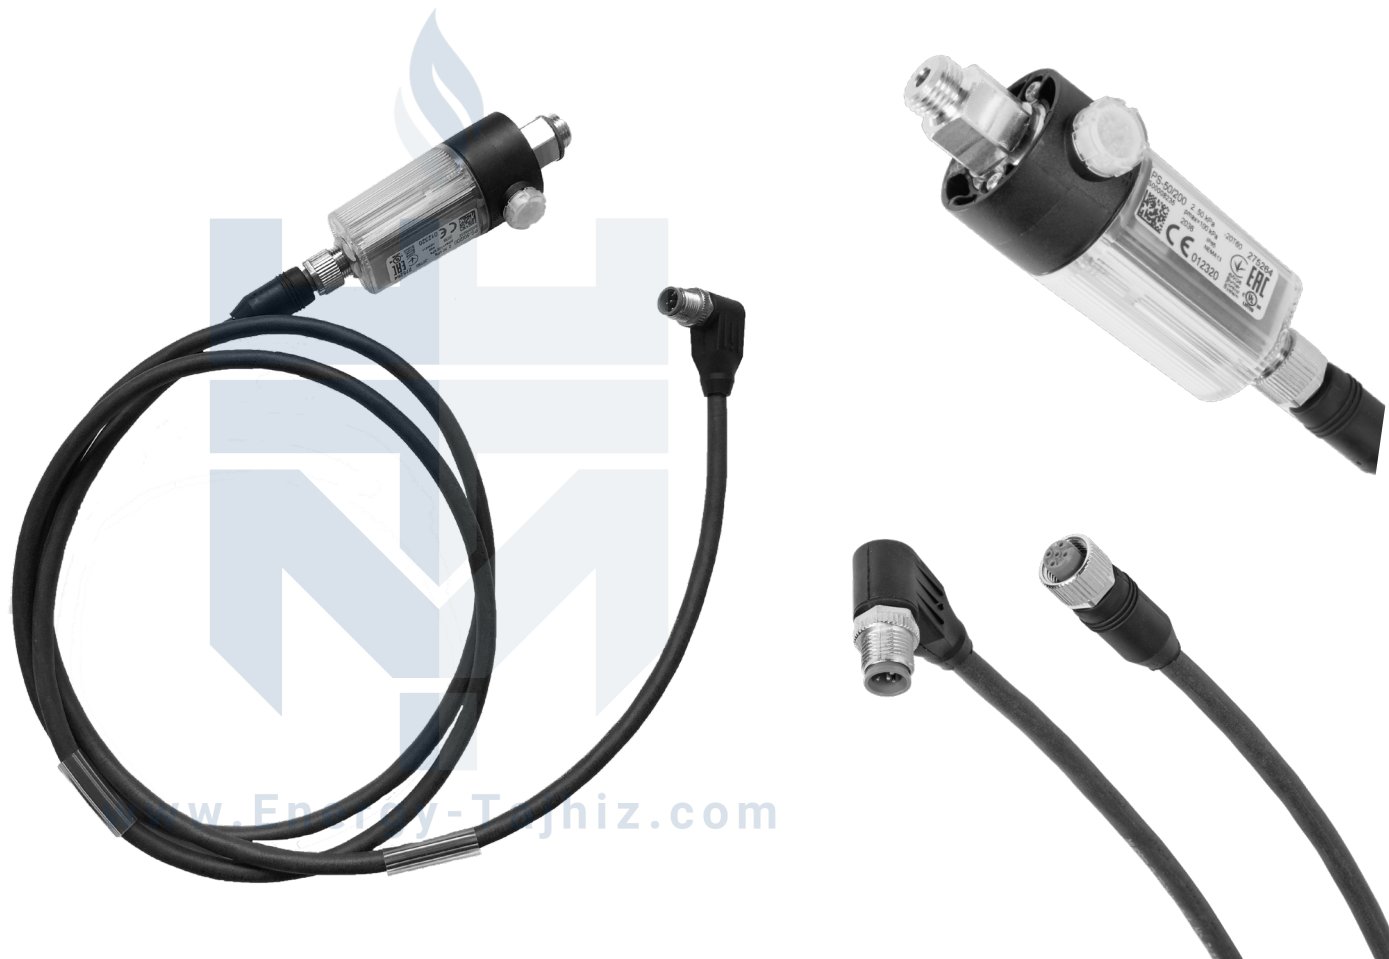

MultiBloc® Generation E multifunctional control

Nominal diameters	VB-050: Rp 1½ - 2 VB-065 to VB-150: DN 65 - 150 VB-2L: NPT 1½ - 2 VB-2½L to VB-6L: NPS 2½ - 6
Maximum inlet pressure	VB-050 $p_{max.} = 60 \text{ kPa (600 mbar)}$ VB-065...150 $p_{max.} = 70 \text{ kPa (700 mbar)}$ VB-2L $p_{max.} = 8 \text{ PSI (240 "W.C.)}$ VB-2½L...6L $p_{max.} = 10 \text{ PSI (280 "W.C.)}$
Outlet pressure range	Only in combination with VD-R... and PS-... PS-0: 0 kPa / 0 "W.C. PS-10/40: 0.4-10 kPa / 1.6-40 "W.C. PS-50/200: 2.0-50 kPa / 8.0-200 "W.C.
Accuracy class	± 5 % or ± 50 Pa (as per EN 88-3)
Opening time	approx. 6 sec. until 100 % open
Closing time	< 1 sec.
Switching rate	max. 360/h
Ambient temperature	-20 °C to +60 °C

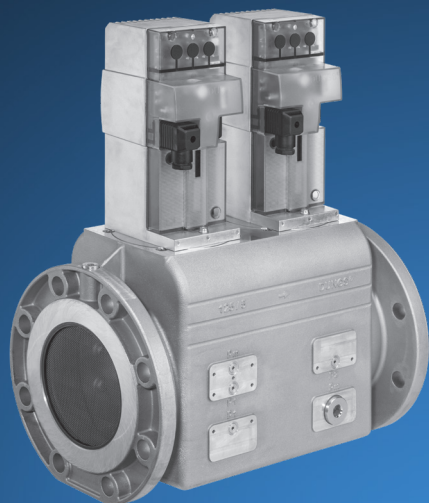

MultiBloc® Generation E multifunctional control

Process liquids / gases

As per EN 437:2018

Suitable for gases of gas families 1,2,3, 100% hydrogen (dry), bio and digester gases (DVGW G 260 (A)) up to max. 1.0 vol. % H₂S (dry).

Do not operate the MBE... below 0 °C in liquid gas systems. Only suitable for gaseous liquid gas, liquid hydrocarbons destroy the sealing materials.

Valve V1, Valve V2

Class A (EN 161), Group 2 (EN 13611)

Electrical connection

Plug as per DIN EN 175301-803

Class II control (EN/UL 60730-1)

Voltage / frequency

VD-...-AC: 100-240 VAC, 50/60 Hz

VD-...-DC: 24 VDC ± 30 %

Duty cycle 100 %

Power consumption per VD

VD-...-AC: max. 16 VA / 8 W per drive

Starting current max 1 A for 0.02 s

VD-...-DC: max. 8 W per drive

Starting current max 10 A for 0.02 s


Degree of protection

IP 55 as per IEC 529 (EN 60529)

Dirt trap device


Filter

A suitable gas filter must be installed upstream.

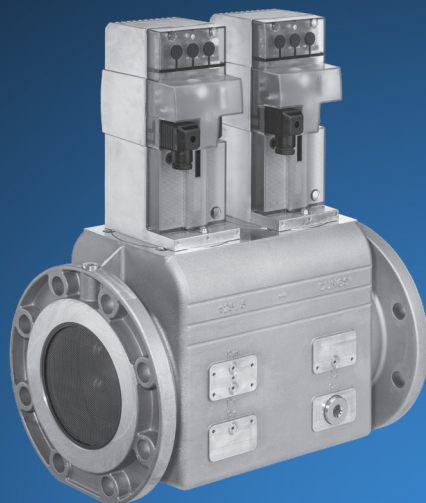

MultiBloc® Generation E multifunctional control

Vibration resistance	VD-...-AC: tested as per EN 13611	
	VD-...-DC: tested as per EN 13611 & MIL-810G	
Duty cycle	100 %	
Installation position	Vertically upright to lying horizontally.	
Materials of gas conveying parts	Housing:	Aluminium
	Seals:	NBR basis (VB-050 & VB-2L) VMQ (VB-065...150 & VB-2½L...6L)

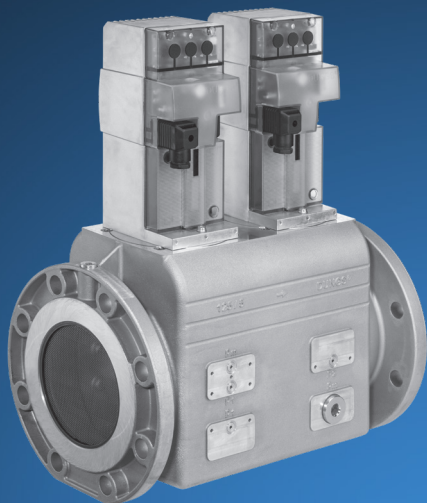

www.Energy-Tajhiz.com

CE: EN 13611; EN 161; EN 126; EN 88-1; EN 88-3

cUL_{us}: UL Listed to UL 429 and to ANSI Z21.21/CSA 6.5 C/I
UL Listed to ANSI Z21.18/CSA 6.3

VB-100 & VB-125:
UL Recognised to UL 429 and to ANSI Z21.21/CSA 6.5 C/I

FM: Approval Class 7400

AGA: AS 4629-2005



EAC: TP TC 010/2011; TP TC 004/2011; TP TC 020/2011; TP TC 016/2011

UA: EN 13611; EN 161; EN 88-1



www.Energy-Tajhiz.com

Dimensions

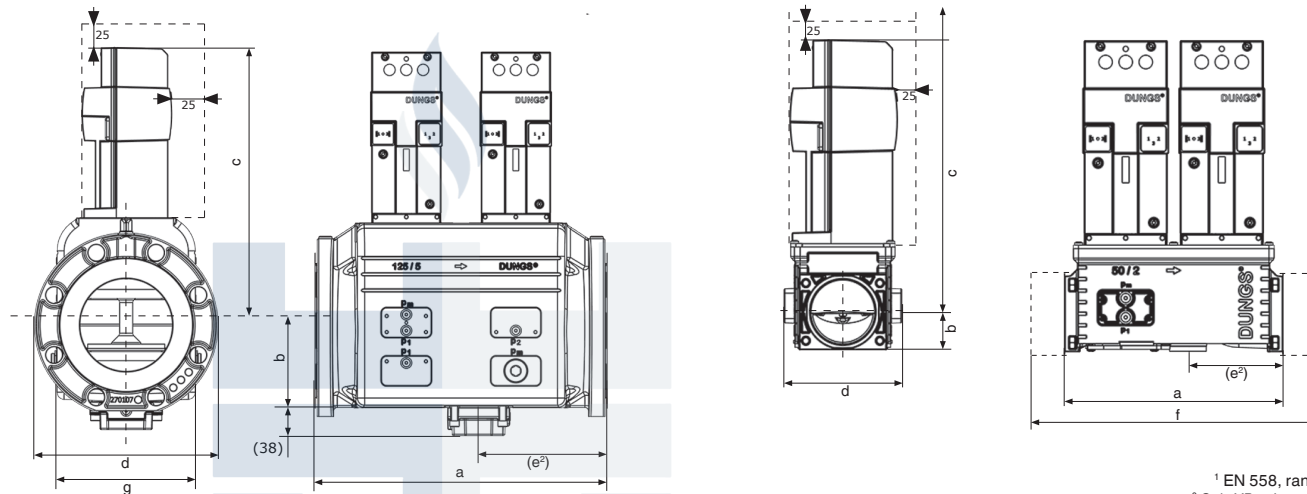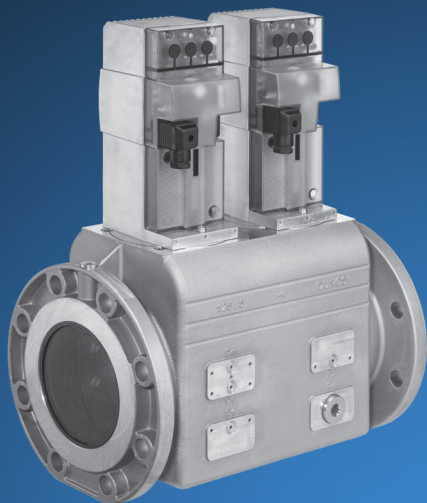

¹ EN 558, range 1

² Only VB-...L versions



³ DN as per EN 1092-1:2007 PN 16 (raised face)

⁴ NPS as per ASME 16.5 Class 150 (raised face)


Type	Size	Dimensions							Weight	Mid-volume space
		a	b	c	d	e ²	f	g		
MBE-050-...	Rp 2 / NPT 2	250 mm	44 mm	313 mm	135 mm	109 mm	327 mm	-	8.9 kg	0.95 l
MBE-2L-...	Rp 2 / NPT 2	9.8 in	1.7 in	12.3 in	5.3 in	4.3 in	12.9 in	-	19.6 lbs	0.95 l
MBE-065-...	³⁺⁴ DN 65	290 mm	106 mm	382 mm	180 mm	121 mm	-	136 mm	13.5 kg	2.36 l
MBE-2½L-...	³⁺⁴NPS 2½	11.4 in	4.2 in	15.0 in	7.1 in	4.8 in	-	5.4 in	29.7 lbs	2.36 l
MBE-080-...	³⁺⁴ DN 80	310 mm	106 mm	382 mm	193 mm	126 mm	-	146 mm	14.5 kg	2.68 l
MBE-3L-...	³⁺⁴NPS 3	12.2 in	4.2 in	15.0 in	7.6 in	5.9 in	-	5.7 in	32.0 lbs	2.68 l
MBE-100-...	³ DN 100	350 mm	106 mm	382 mm	225 mm	140 mm	-	171 mm	17.0 kg	3.82 l
MBE-4L-...	⁴NPS 4	13.8 in	4.2 in	15.0 in	8.8 in	5.5 in	-	6.7 in	37.5 lbs	3.82 l
MBE-125-...	³ DN 125	400 mm	118 mm	382 mm	253 mm	176 mm	-	196 mm	18.5 kg	5.35 l
MBE-5L-...	⁴NPS 5	15.7 in	4.6 in	15.0 in	10.9 in	6.9 in	-	7.7 in	40.7 lbs	5.35 l
MBE-150-...	³⁺⁴ DN 150	480 mm	132 mm	382 mm	282 mm	204 mm	-	216 mm	23,9 kg	6,93 l
MBE-6L-...	³⁺⁴NPS 6	18.9 in	5.2 in	15.0 in	11.1 in	8.0 in	-	8.5 in	52.7 lbs	6,93 l

Pressure taps


**VB-050
VB-2L**

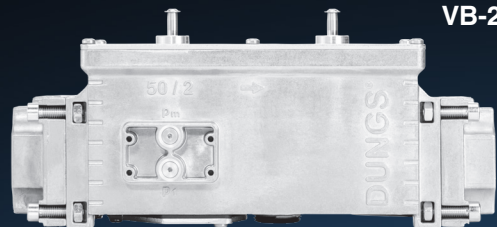


1, 2, 3, 4
Sealing plug G $\frac{1}{8}$ ISO 228



5
Locking screw
For version VB-2L only: connection for vent line **NPT 1**

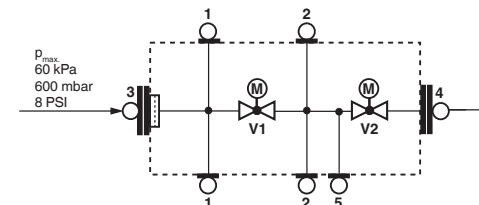


**VB-065...150
VB-2½L...6L**

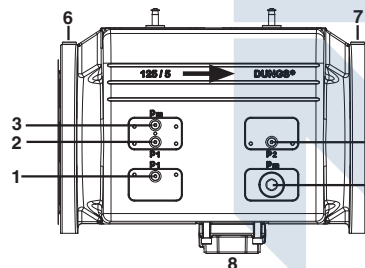


1, 2, 3, 5
Sealing plug G $\frac{1}{8}$ ISO 228


4
G $\frac{3}{4}$ for system accessories

6, 7
Sealing plug G $\frac{1}{4}$ ISO 228



8
For version VB...L only: connection for vent line
VB-2½L = 1¼" NPT
VB-3L = 1½" NPT
VB-4L = 2" NPT
VB-5L = 2" NPT
VB-6L = 2½" NPT

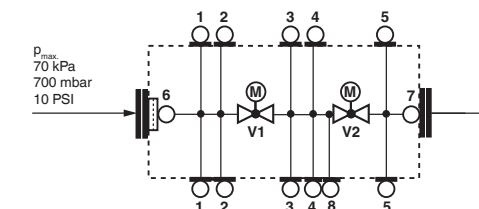

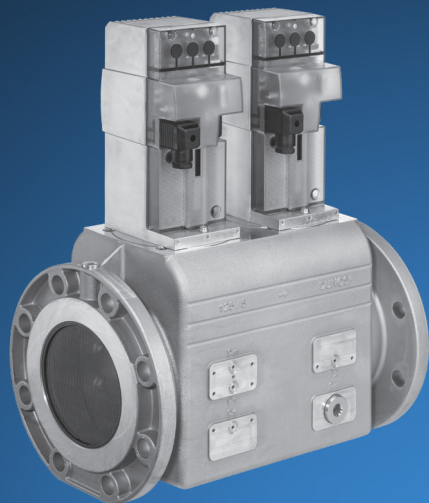


ValveBody		
Designation	Nominal diameter	Item number
VB-050	Rp 1½ - 2	274846
VB-065	DN 65	274659
VB-080	DN 80	274661
VB-100	DN 100	274663
VB-125	DN 125	274665
VB-150	DN 150	274667
VB-2L	NPT 1½ - 2	274847
VB-2½L	NPS 2½	274660
VB-3L	NPS 3	274662
VB-4L	NPS 4	274664
VB-5L	NPS 5	274666
VB-6L	NPS 6	274668

www.Energy-Tajhiz.com



MBE components

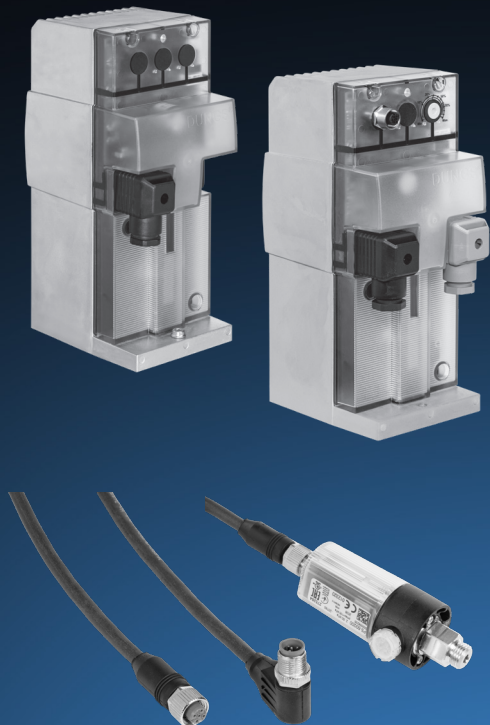

ValveDrive

Designation	Item number	Voltage	Valve function	Regulator function	Close position indicator switch	Position indicator	Operating mode display
VD-V-AC	272262	100-240 VAC 50/60 Hz	x			x	x
VD-V-AC-POC	275358		x		x	x	x
VD-R-AC	274654		x	x		x	x
VD-R-AC-POC	275361		x	x	x	x	x
VD-V-DC	275359	24 VDC	x			x	x
VD-V-DC-POC	275360		x		x	x	x
VD-R-DC	275362		x	x		x	x
VD-R-DC-POC	275363		x	x	x	x	x

PressureSensor

Designation	Item number	Max. operating pressure	Outlet pressure			
			Min.		Max.	
			[kPa]	["W.C.]	[kPa]	["W.C.]
PS-0	275265	20 kPa	-0.5	-2	0.5	2
PS-10/40	275263	70 kPa	0.4	1.6	10	40
PS-50/200	275264	70 kPa	2	8	50	200
Bus cable 1.5 m	276911	-	-	-	-	-

MBE components



ValveDrive Set					
Designation	Item number	VD-R	PS	BUS cable	Pressure switch
VD-R-AC SET 10/40	279299	VD-R-AC	PS-10/40	incl.	-
VD-R-AC SET 50/200	279300	VD-R-AC	PS-50/200	incl.	-
VD-R-AC SET 0	290480	VD-R-AC	PS-0	incl.	-
VD-R-AC SET GW 10/40	292184	VD-R-AC	PS-10/40	incl.	GW 150 A5/1
VD-R-AC SET GW 50/200	292187	VD-R-AC	PS-50/200	incl.	GW 500 A5/1

www.Energy-Tajhiz.com



- **VPS 504 (to VB-100)**
<https://www.dungs.com/en/product/vps-504-valve-proving-system-for-multifunctional-gas-controls>
- **Pressure controller**
<https://www.dungs.com/en/productgroups/pressure-switches-for-gas-and-air>
- **Manometer**
<https://www.dungs.com/en/product/manometers-accessories-pressure-gauge-push-button-cock-pressure-gauge-shutoff-valve>
- **Plugs**



www.Energy-Tajhiz.com

Flow diagram

Operating range as per EN 88-1 / EN 88-3

Basis
+15 °C, 101.3 kPa / 60 °F, 407 "W.C.
dry

..... MBE-...-VV
—— MBE-...-VR
- - - - $p_2 < 10.0 \text{ kPa} / 40 \text{ "W.C.}$
■ $p_2 = 0 \text{ kPa} / 0 \text{ "W.C.}$

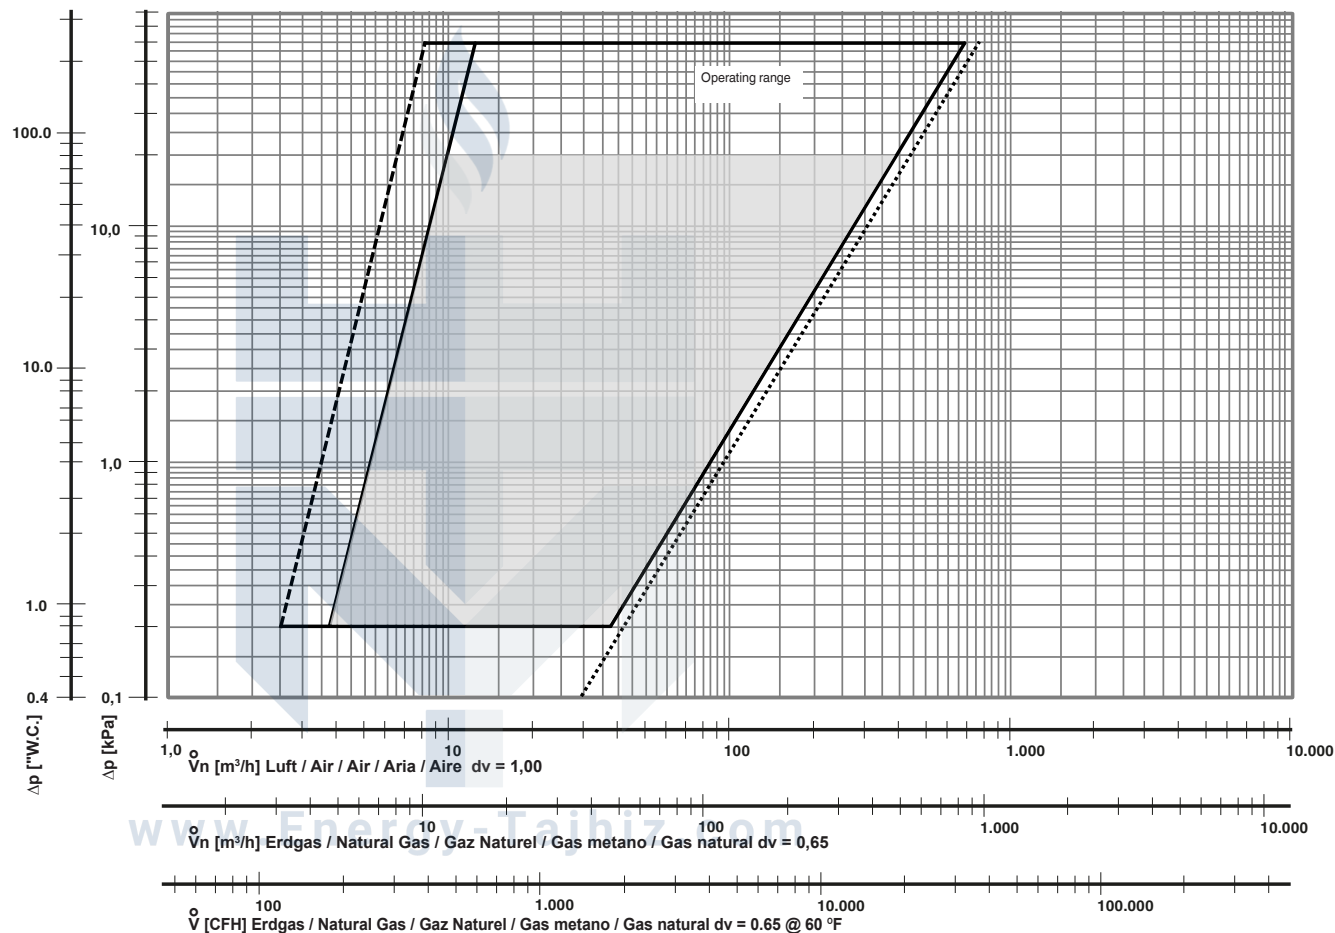
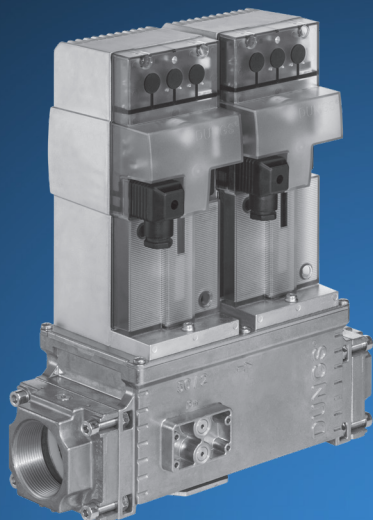


Flow diagram

Operating range as per EN 88-1 / EN 88-3

Basis
+15 °C, 101.3 kPa / 60 °F, 407 "W.C.
dry

..... MBE-...-VV
—— MBE-...-VR
- - - - $p_2 < 10.0 \text{ kPa} / 40 \text{ "W.C.}$
■ $p_2 = 0 \text{ kPa} / 0 \text{ "W.C.}$

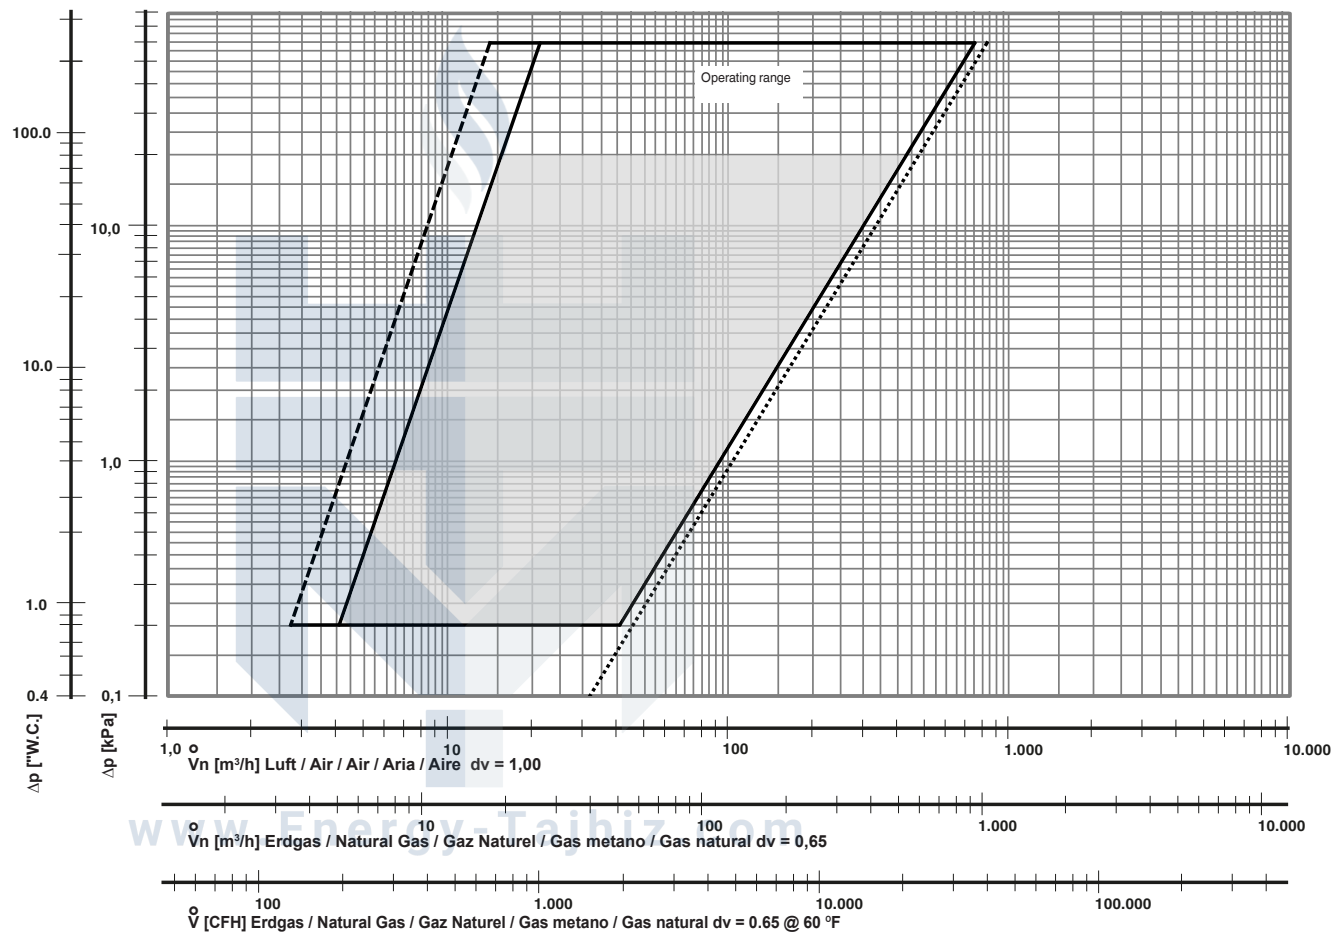
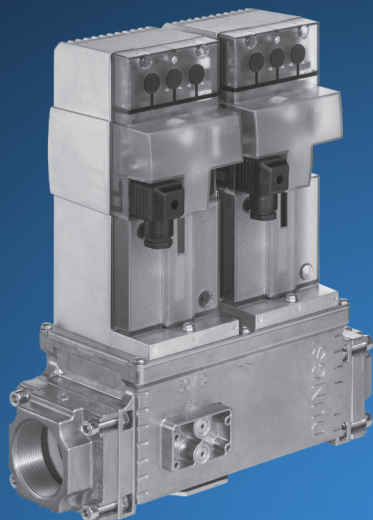


Flow diagram

Operating range as per EN 88-1 / EN 88-3

Basis
+15 °C, 101.3 kPa / 60 °F, 407 "W.C.
dry

..... MBE-...-VV
—— MBE-...-VR
- - - - $p_2 < 10.0 \text{ kPa} / 40 \text{ "W.C.}$
■ $p_2 = 0 \text{ kPa} / 0 \text{ "W.C.}$

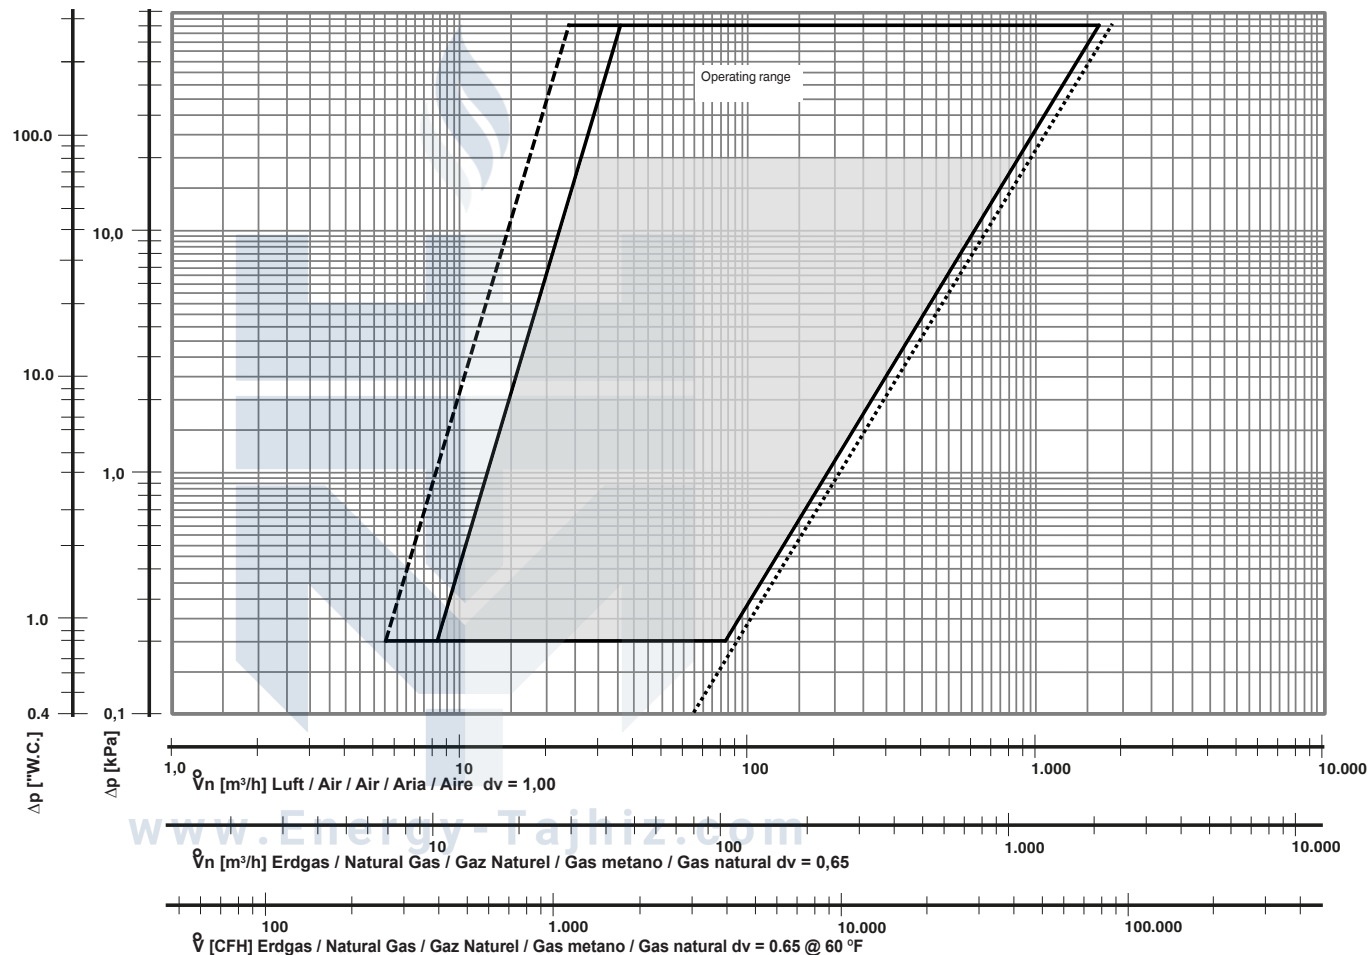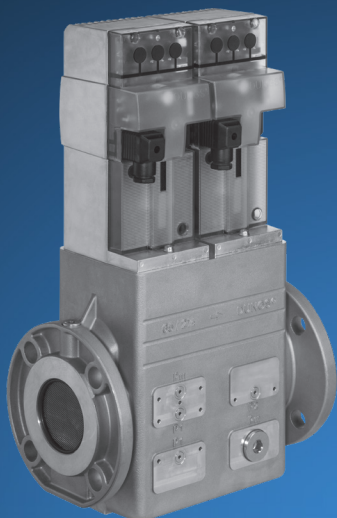


Flow diagram

Operating range as per EN 88-1 / EN 88-3


Basis
+15 °C, 101.3 kPa / 60 °F, 407 "W.C.
dry

..... MBE-...-VV
—— MBE-...-VR
- - - - $p_2 < 10.0 \text{ kPa} / 40 \text{ "W.C.}$
■ $p_2 = 0 \text{ kPa} / 0 \text{ "W.C.}$

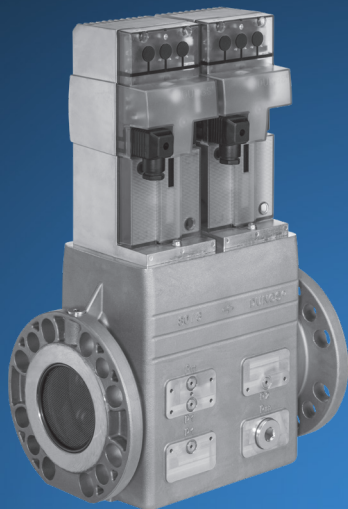

MBE-080-...
MBE-3L-...

DUNGS®
Combustion Controls


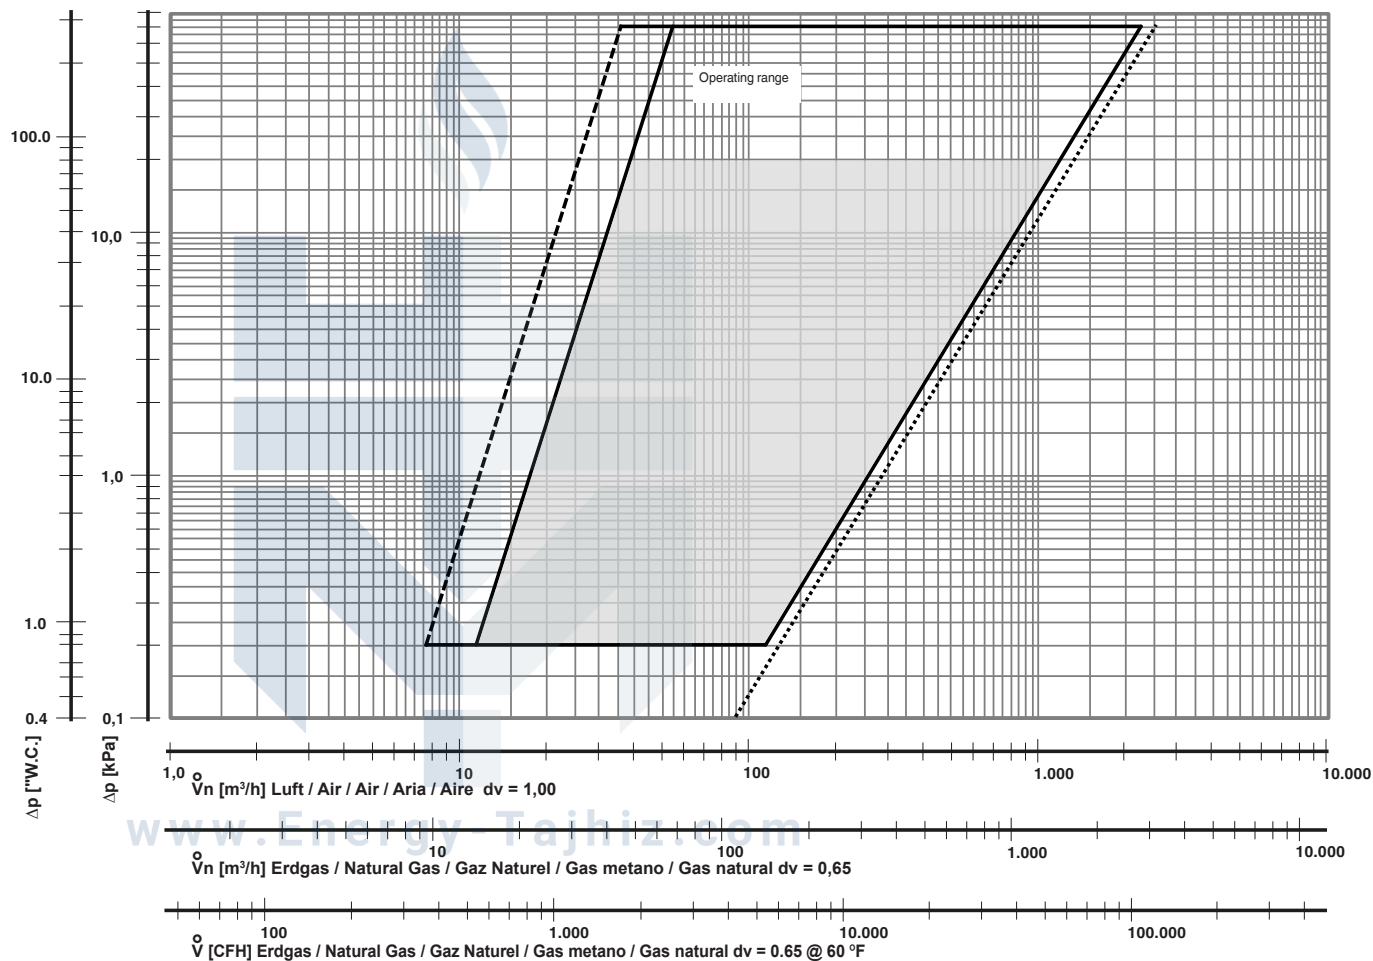


Flow diagram

Operating range as per EN 88-1 / EN 88-3

Basis
+15 °C, 101.3 kPa / 60 °F, 407 "W.C.
dry

..... MBE-...-VV
—— MBE-...-VR
- - - - $p_2 < 10.0 \text{ kPa} / 40 \text{ "W.C.}$
■ $p_2 = 0 \text{ kPa} / 0 \text{ "W.C.}$

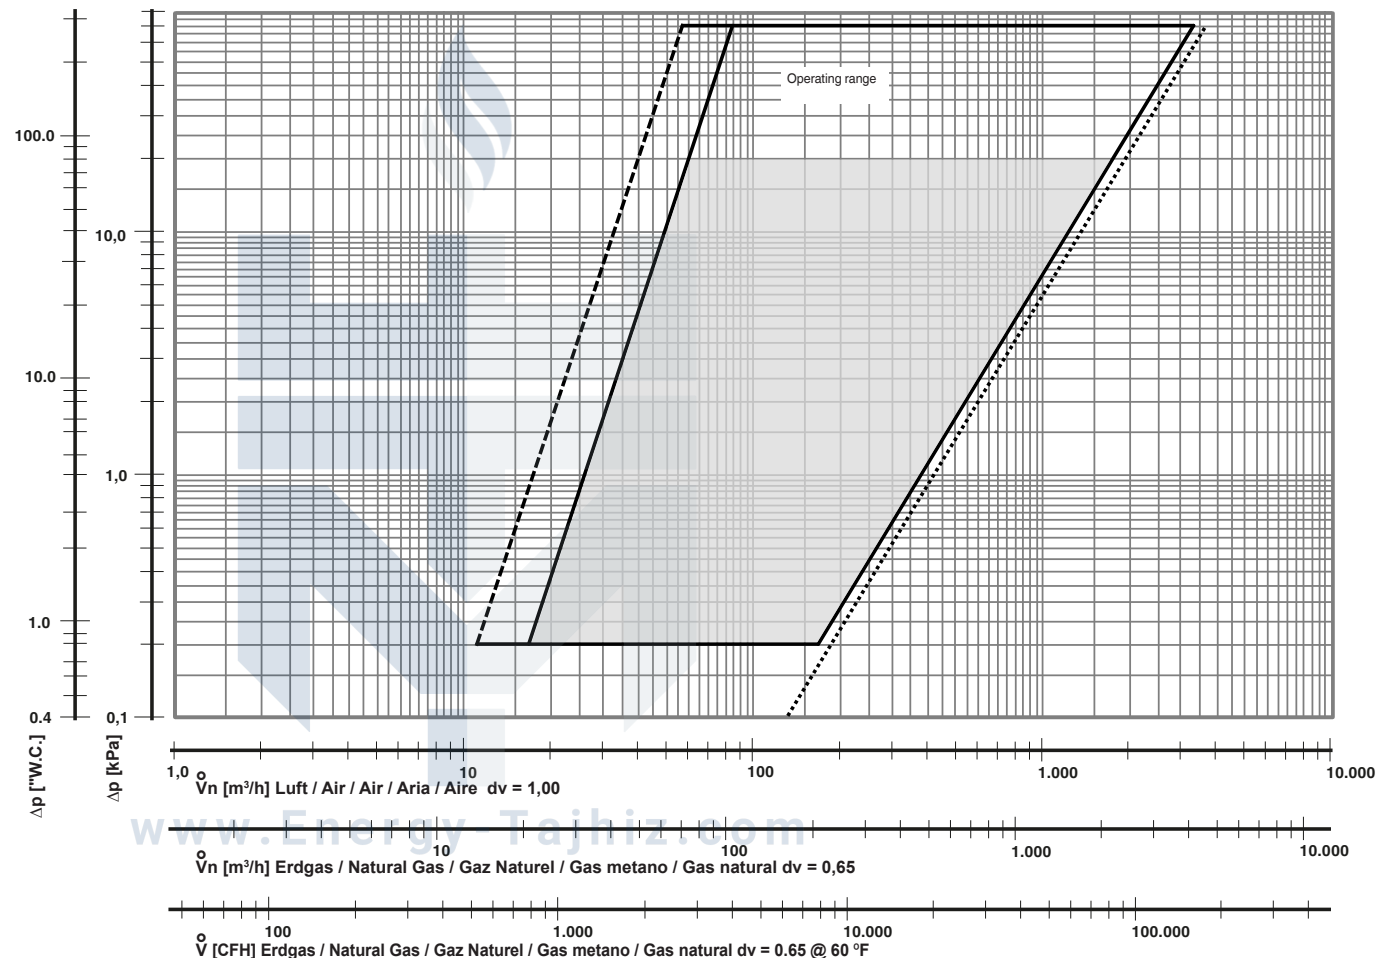
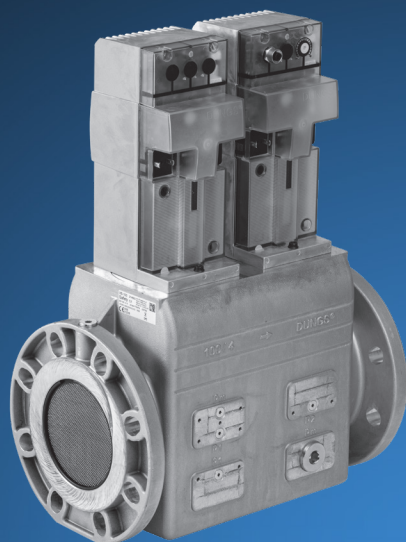


Flow diagram

Operating range as per EN 88-1 / EN 88-3

Basis
+15 °C, 101.3 kPa / 60 °F, 407 "W.C.
dry

..... MBE-...-VV
—— MBE-...-VR
- - - - $p_2 < 10.0 \text{ kPa} / 40 \text{ "W.C.}$
■ $p_2 = 0 \text{ kPa} / 0 \text{ "W.C.}$

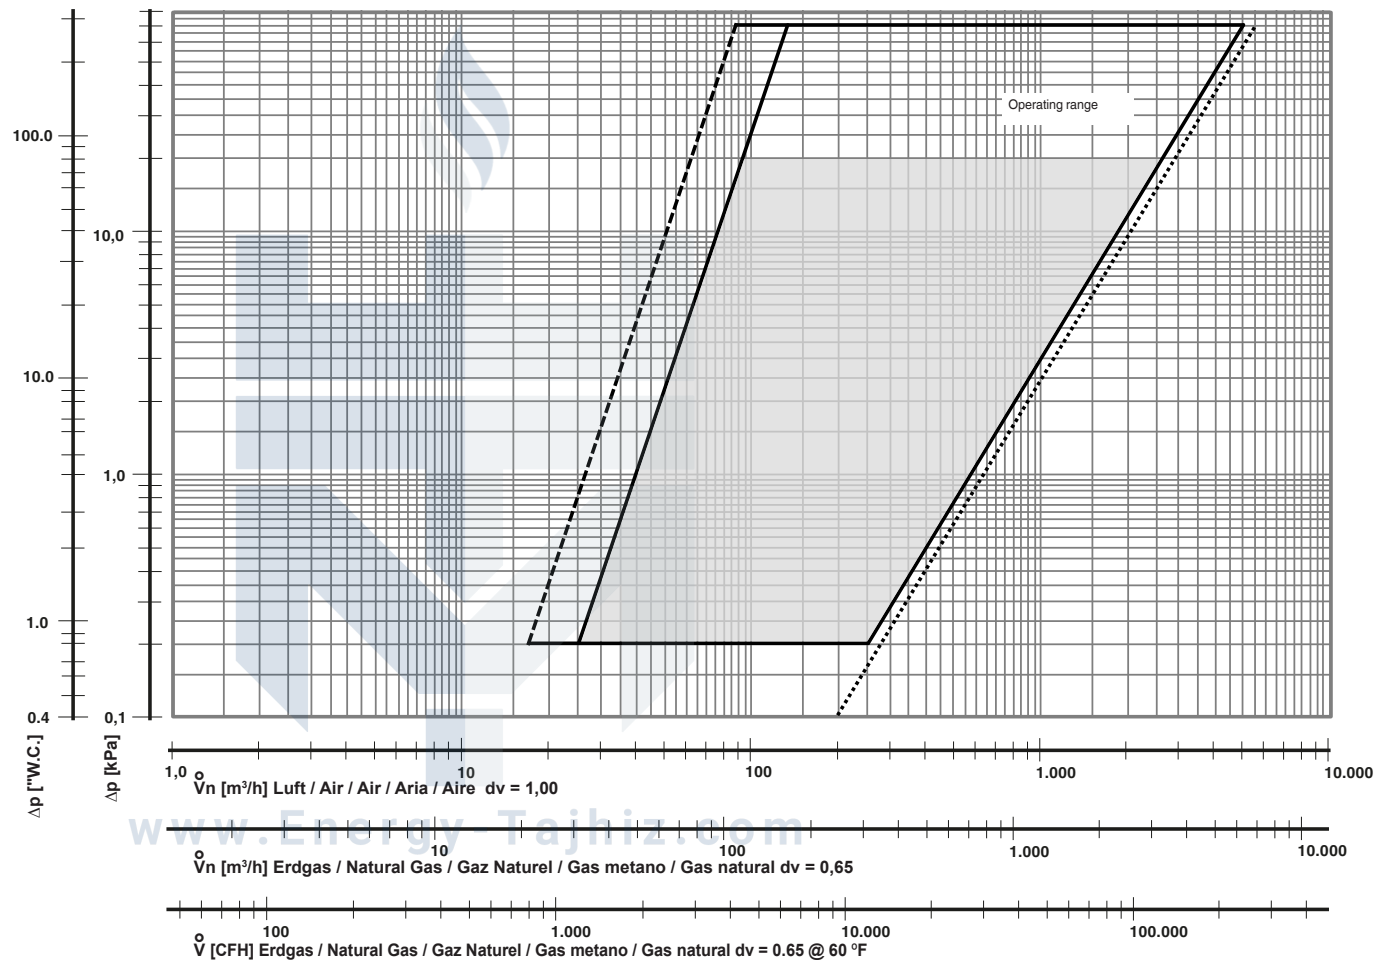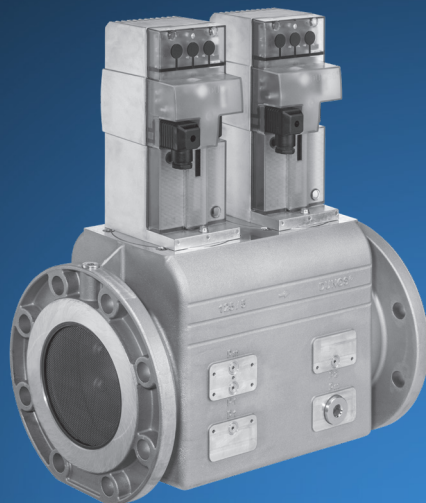


Flow diagram

Operating range as per EN 88-1 / EN 88-3

Basis
+15 °C, 101.3 kPa / 60 °F, 407 "W.C.
dry

..... MBE-...-VV
—— MBE-...-VR
----- $p_2 < 10.0 \text{ kPa} / 40 \text{ "W.C.}$
■ $p_2 = 0 \text{ kPa} / 0 \text{ "W.C.}$

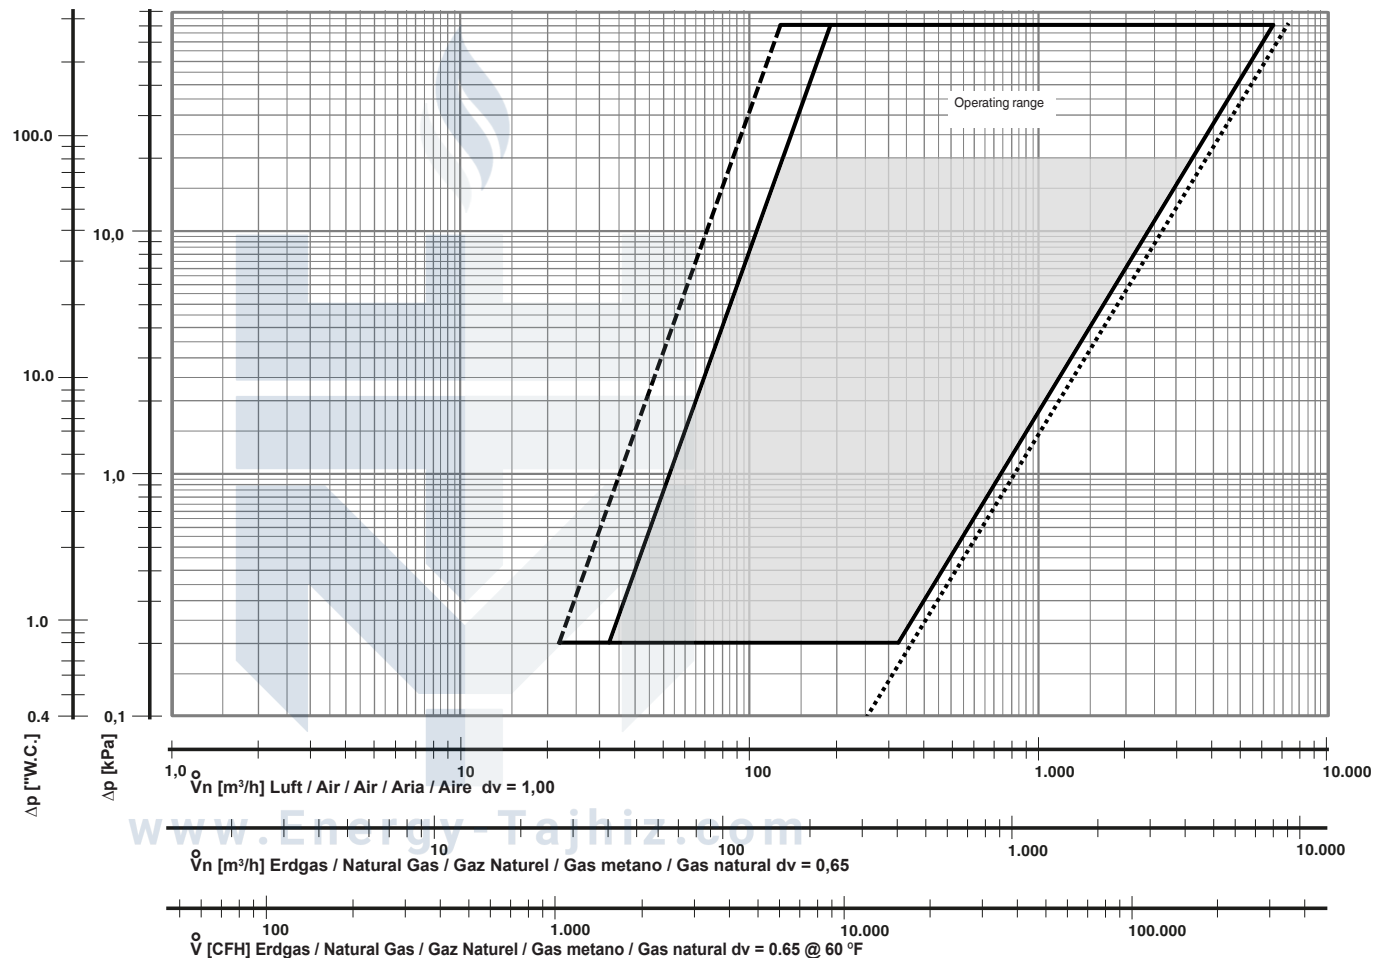

$$\dot{V}_{\text{gas used}} = \dot{V}_{\text{air}} \times f$$

$$f = \sqrt{\frac{\text{air density}}{\text{density of the gas used}}}$$



Type of gas	Density [kg/m³]	dv	f
Natural gas	0.81	0.65	1.24
City gas	0.58	0.47	1.46
Liquid gas	2.08	1.67	0.77
Air	1.24	1.00	1.00
Hydrogen	0.085	0.069	3.82

www.Energy-Tajhiz.com

Subject to technical modification in the interest of technical progress.



www.Energy-Tajhiz.com

Karl Dungs GmbH & Co. KG
Karl-Dungs-Platz 1
73660 Urbach
Germany

Telephone +49 7181-804-0
Fax +49 7181-804-166
E-mail info@dungs.com
Internet www.dungs.com



ENERGY TAJHIZ MELAL
تجهيزات انرژی، تأسیسات و اتوماسیون صنایع

CONTACT US:

	Tel: (+98) 21 8280 1045 Mob: (+98) 910 888 1045 Mob: (+98) 910 888 1035		Web: www.energy-tajhiz.com Email: Info@energy-tajhiz.com Email: energytajhiz.co@gmail.com
---	---	---	---